

SOLAR EEZY

5 EASY STEPS

Clark
POOLS & SPAS

STEP 1 - GLUE THE VACREL & BALANCE PIPE KITS




STEP 2 - INSTALL THE HEADER PIPES

Using EzyClips (Metal Roof)
Or EzyTies (Tile Roof)




STEP 3 - INSTALL THE RUBBER COUPLINGS

To connect the Header Pipes,
Vacrel & Balance Pipe Connector Kits

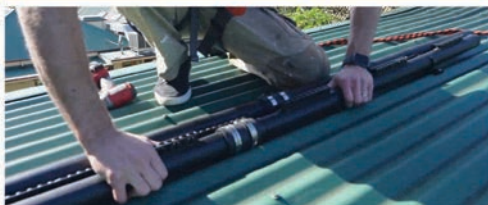

STEP 4 - LAY THE SOLAR COILS

And connect them to the Header Pipes
using the Barb Locks. Secure to the roof
using the supplied ProSil adhesive.

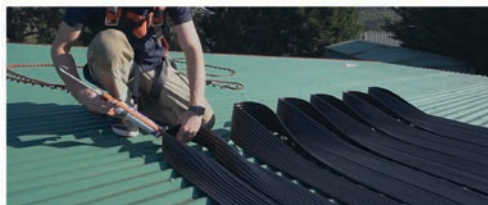

STEP 5 - INSTALL THE PIPEWORK & DRAIN DOWN KIT

Connect the system to the
supply and return pipework



TOOLS REQUIRED



Standard
Caulking
Gun



Drill
Driver



Tape
Measure



Phillips
Head Bit



8.5mm
Drill Bit



5/16 Hex Bit
OR Flat Head
Screwdriver



Marker



Type 'P' PVC
Cement &
Primer

For 'How To' videos and easy-to-follow, expert instructions please visit



clarkrubber.com.au



13 80 90

